



METER

TEROS 10 SOIL MOISTURE SENSOR



TEROS 10 QUICK START

Preparation


Inspect and verify Teros 10 components. The Teros verification clip gives the best assessment of proper sensor function and accuracy. The Teros 10 should read 0.35 to 0.42 m³/m³ on the verification clip. If a verification clip is not available, test basic sensor functionality in air and water. The Teros 10 will read ~0.64 m³/m³ in water and a slightly negative value in air.

NOTE: The sensors are optimized to read in soils, therefore the sensor will not read 100% in pure liquid water. Values above use the mineral soil calibration.

Installation Tool

Proper installation of the sensors is critical for proper operation. Refer to the [TEROS 10 User Manual](#) for details.

For easy installation, use the borehole installation tool. The installation tool (shown below) is available for rent from METER Group. Contact [Customer Support](#) for more information.

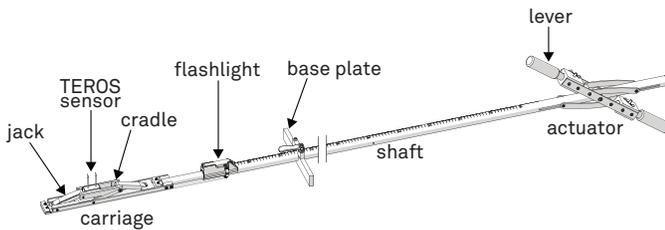


Installation

1. Insert Sensor


Auger or trench a hole to the desired sensor depth. Insert the sensor into the undisturbed soil.

When using the borehole installation tool, load the Teros 10 as shown. Lower the tool into the hole or trench with the back of the tool supported by the far wall. Pull on the lever to activate the jack and insert the sensor into hole wall.



3. Repack Soil and Protect Cables

Secure and protect cables with PVC casing or flexible conduit and backfill the trench or hole.



What is soil moisture?

Soil moisture is a key variable in controlling the exchange of water and heat energy between the land surface and the atmosphere through evaporation and plant transpiration.

[Learn more at metergroup.com](http://metergroup.com)

⚠ ATTENTION


TEROS 10 requires the most current software and firmware versions. Please make updates as necessary.

ZL6 firmware version 2.02 or higher
PROCHECK firmware version 1.69 or higher
ZENTRA Utility version 1.12 or higher

Go to metergroup.com/environment/downloads/ to find the current software or firmware version for the data logger being used.

2. Check Sensor Operation

Plug the sensor into the data logger and use the **SCAN** function in the software to do a quick check of sensor operation before backfilling.



4. Plug Sensor In and Configure Logger

Plug the sensor into the data logger. Use data logger software to apply appropriate settings to the sensors plugged into each data logger port.

The Teros 10 is an analog sensor and will not be automatically recognized on METER data loggers. Select the right sensor for each port.

